


BOPP/BOPE/BOPLA/BOPET 双向拉伸薄膜生产线 Bidirectional Stretch Film Production Line



BOPP薄膜强度高、阻气性好、印刷性能和抗撕裂性能好，被广泛应用于食品包装、医用包装、工业包装、烟草包装、电工膜、锂电池隔膜等领域。

BOPP film has high strength, good gas barrier properties, good printing performance and tear resistance. It is widely used in food packaging, medical packaging, industrial packaging, tobacco packaging, electrical film, lithium battery separators and other fields.

设备型号	Equipment model	1200	2400	3600	4800
制品宽度(mm)	Product width (mm)	1000	2200	3400	4600
制品厚度(mm)	Product thickness (mm)	0.1—0.3mm	0.1—0.3mm	0.1—0.3mm	0.1—0.3mm
最大线速度 m/min	Maximum line speed m/min	40—150m	60—180	80—250	100—300
进膜宽度范围 mm	Film width	200—400mm	400—600	600—1000	800—1200
最大拉伸宽度 mm	Maximum stretch width	1200mm	2400mm	3600mm	4800mm
出膜宽度范围 mm	Film width range	8000—1200mm	2000—2400	3200—3600	4200—4800
最大拉伸倍数	Maximum stretch ratio	1:5	1: 6	1: 7	1: 8


公司机器案例 Company Case

工艺流程：挤出机—精密过滤室—熔体泵—衣架式模具—流延成型—NDC测厚仪—MDO纵向拉伸机—厚度计—横向横拉机—厚度计—牵引机—收卷机—分切机薄膜尺寸

Process flow: extruder—precision filter chamber—melt pump—hanger-type mold—casting molding—NDC thickness gauge—MDO longitudinal stretching machine—thickness gauge—transverse horizontal stretching machine—Thickness gauge—Hauling machine—Winding machine—Slitting machine film size



设备流程图 Flow Chart

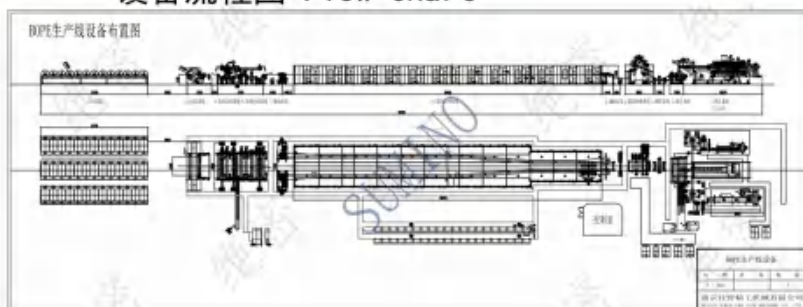

应用范围 Application



联系我们 Contact Us

地址：江苏省南京市江宁区开拓路11号
电话：025 5183 9686 / 133 9078 0291
邮箱：liliming@susumino.com
网址：www.susumino.com

