


TPU/TPE/EVA流延膜生产线

TPU/TPE/EVA cast film production line



该设备生产胶膜的幅宽1372毫米-1520毫米，厚度0.02-3.0毫米的，可采用一台或多台单螺杆挤出机共挤，每台挤出机分为8个温控区准确控温。最大产量可达600KG/H，做单层、A/B/A或A/B分配模式。能满足上下两层同时覆离型膜、附布。采用PLC整体控制，只需一人便能轻松操控，关键部件拆卸替换方便，人性化，预留远程操控端口，可全球异地实现同步监控，性价比极高。制品透明度高、晶点少、收卷无气泡。


This equipment produces film with a width of 1200 mm-3600 mm and a thickness of 0.02-3.0 mm.

It can be co-extruded by one or more single-screw extruders. The machine is divided into 8 temperature control areas for accurate temperature control. The maximum output can reach 600KG/H, with single layer, A/B/A or A/B distribution mode. It can meet the requirements of covering the upper and lower layers with release film at the same time Attached cloth. It adopts PLC overall control, which can be easily controlled by only one person, and the key components are easy to disassemble and replace, and it is user-friendly. The remote control port is reserved, which can be changed globally. Realize synchronous monitoring with high cost performance. The product has high transparency, few crystal points, and no bubbles when rewinding.


设备型号	Equipment model	1200/2400/3600
制品宽度(mm)	Product width (mm)	1000/2200/3400
制品厚度(mm)	Product thickness (mm)	0.02—3mm
最大线速度 m/min	Maximum line speed m/min	5—30m

公司机器案例 Company Case


1800mm TPU流延膜生产线 1800mm TPU Casting Film Line

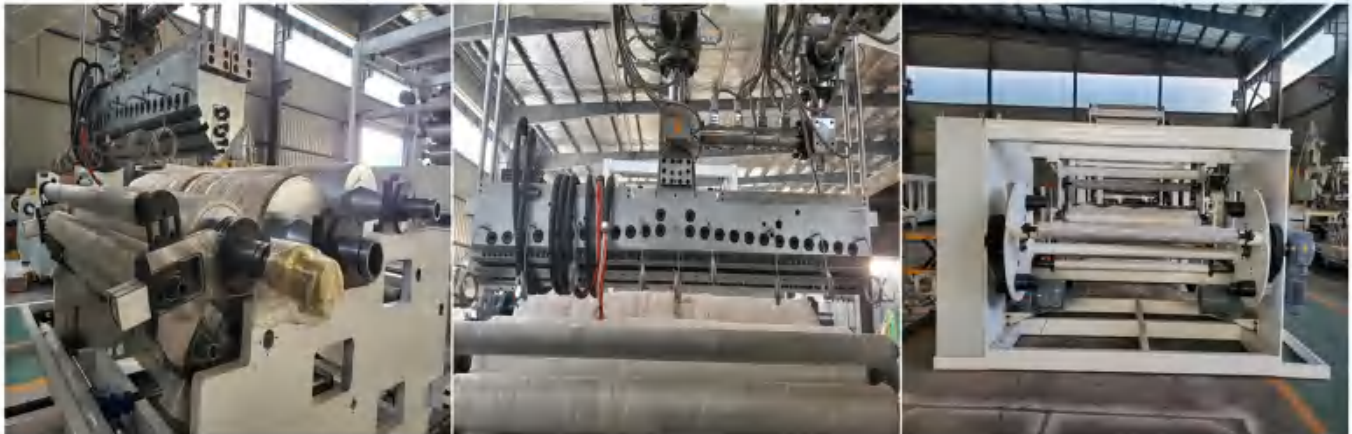

设备流程图 Flow Chart

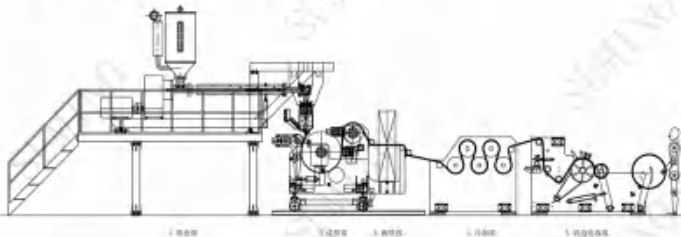

应用范围 Applications



联系我们 Contact Us

地址：江苏省南京市江宁区开拓路11号
电话：025 5183 9686 / 133 9078 0291
邮箱：liliming@susumino.com
网址：www.susumino.com

