

缠绕膜生产线 Stretch film production line



本生产线以LLDPE(线性低密度聚乙烯)为主要原料,采用几种不同牌号的树脂,通过挤出机挤出而生产出具有自粘性的单面粘或双面粘三层、五层拉伸缠绕膜。可选用最新式机械手装置,实现自动上轴、自动上纸管自动化,节省了人工成本;2、结构紧凑,性价比高、采用三层、五层共挤、自动换卷系统、优质的产品外观和性能。

This production line uses LLDPE (linear low-density polyethylene) as the main raw material, uses several different grades of resin, and is extruded through an extruder to produce self-adhesive Single-sided or double-sided three-layer or five-layer stretch film. The latest manipulator device can be used to realize automatic shaft loading and automatic paper tube loading, saving labor cost; 2. Compact structure, high cost performance, three-layer and five-layer co-extrusion, automatic roll changing system, high-quality product appearance and performance.


设备型号	Equipment model	1600	2000	2600	3400
制品宽度(mm)	Product width (mm)	1300	1600	2200	3000
制品厚度(mm)	Product thickness (mm)	0.02—0.1mm	0.02—0.1mm	0.02—0.1mm	0.02—0.1mm
最大线速度 m/min	Maximum line speed m/min	50—100m	50—120m	50—180m	50—200m

公司机器案例 Company Case

2000mm PE缠绕膜 2000mm PE Stretch film Machine



设备流程图 Flow Chart

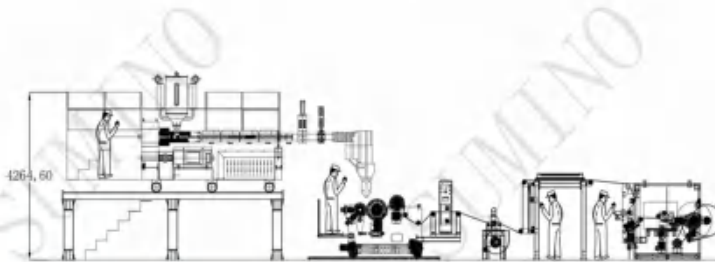

应用范围 Applications



联系我们 Contact Us

地址: 江苏省南京市江宁区开拓路11号
 电话: 025 5183 9686 / 133 9078 0291
 邮箱: liliming@susumino.com
 网址: www.susumino.com

