

热熔喷胶复合生产线 Hot melt adhesive compound production line

热熔复合机是通过热辐射对塑料、片材、布匹等进行热熔贴合处理，把两种或两种以上不同材料相结合并施加一定压力使其复合成一体加工机器。水胶复合机主要适用于鞋帽、家纺、箱包、汽车内饰、地毯等行业。油胶复合机主要用于将PU胶通过布点的形式转移到布面上。具有良好的牢度、耐洗性、柔软性、透气性强、不变形等优点。The hot-melt laminating machine uses heat radiation to heat-melt plastic, sheet, cloth, etc., combines two or more different materials and applies a certain amount Pressure makes it compound into one processing machine. The water glue compound machine is mainly suitable for industries such as shoes and hats, home textiles, luggage, car interiors, carpets and so on. Oil glue compound machine is mainly used to transfer PU glue to the cloth surface in the form of dots. It has the advantages of good fastness, washing resistance, flexibility, strong air permeability and no deformation.

设备型号	Equipment model	600	1200	1800	2400
制品宽度(mm)	Product width (mm)	500	1100	1700	2300
制品厚度(mm)	Product thickness (mm)	0.005—0.02	0.008—0.03	0.01—0.04	0.01—0.05
最大线速度 m/min	Maximum line speed m/min	30—80m	60—120m	60—160m	60—200m


公司机器案例 Company Case

主要特点：涂布头采用高速工具钢，具有耐磨、耐高温，抗变形等特点；配有局部胶流调节阀，可高精度调节胶量，并具有开启及关闭功能，可减少停机时的浪费(不漏胶)；设有过滤器装置，可进行有效的过滤。

Main features: The coating head is made of high-speed tool steel, which has the characteristics of wear resistance, high temperature resistance, and deformation resistance; equipped with a local glue flow adjustment valve, which can adjust the glue amount with high precision. It also has opening and closing functions, which can reduce waste during shutdown (no glue leakage); it is equipped with a filter device for effective filtration.



设备流程图 Flow Chart

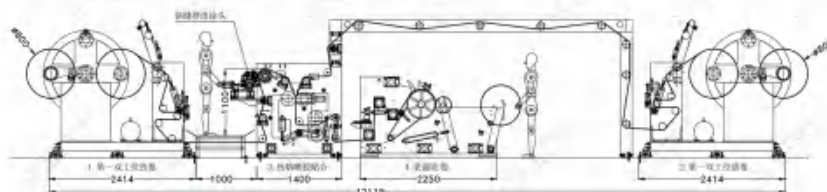

应用范围 Applications



联系我们 Contact Us

地址：江苏省南京市江宁区开拓路11号
 电话：025 5183 9686 / 133 9078 0291
 邮箱：liliming@susumino.com
 网址：www.susumino.com

